



PRODUCT DESCRIPTION

EZ-Flash is an economical 20-mil self-adhering flashing consisting of a distinctive black-over-blue, printed poly film fully laminated with a rubber-modified asphalt adhesive. EZ-Flash is used to seal around window/door openings, over wall sheathing joints and as a roof detail membrane under self-adhesive cap sheets on low-slope roof applications. EZ-Flash offers factory-controlled uniformity with quick and easy peel-and-stick application. This self-adhering flashing exhibits tenacious grip when pressed against the substrate and provides excellent moisture and air leakage protection around openings and over joints/cracks and similar details.

ADVANTAGES

- Provides a seal around fasteners and penetrations to prevent leaks
- Simple and effective peel-and-stick application
- Resists mechanical damage
- Easy to install, inspect and repair
- Primers available to enhance adhesion
- Part of a complete Carlisle Residential building envelope protection system

APPLICATION

EZ-Flash can be applied over most common building materials including house wrap, felt, OSB, gypsum sheathing, concrete, CMU, plywood, lumber, rigid extruded vinyl, fiberglass, metals and foam insulation board. Apply to clean, dry, flush and supported surfaces.

Cut EZ-Flash to length from the roll, remove the release liner and bond to the surface, taking care to avoid forming wrinkles or air bubbles. Shingle lap adjoining pieces of EZ-Flash a minimum of 2" to ensure a waterproof splice. Rough substrates, such as CMU, gypsum sheathing and OSB sheathing may require application of a Carlisle Coatings and Waterproofing contact adhesive to improve adhesion, especially at lower application temperatures. EZ-Flash may be applied at ambient temperatures as low as 25°F. For application below 40°F, it is recommended to store EZ-Flash in a heated area until use and apply over surface prepped with CCW contact adhesive. Any of CCW's contact adhesives listed in the table below can be used to enhance the bond of EZ-Flash as necessary.

Apply contact adhesive in a thin, continuous coat without puddling. Contact adhesive is ready for bonding over with EZ-Flash when surface is still tacky but will not transfer when touched. Apply contact adhesive only over surfaces that will be bonded with EZ-Flash on that day. If contact adhesive loses tack or

TECHNICAL DATA

PROPERTY	TEST METHOD	RESULTS
Thickness		20 mils
Mass	ASTM D412 (C)	709 psi
Roll Size	ASTM D412 (C)	500%
Operating Temp	ASTM D903	4.5 lb/in width
Roll Weight	ASTM E154	27 lbs (min)
Water Absorption (max)	D1876 Mod.	4.5 lb/in width

becomes soiled, re-apply. Consult the CCW Contact Adhesive Technical Data Sheet for more information.

ASTM E2112 requires application of both flexible flashing and exterior perimeter sealant in window installations. EZ-Flash can be applied over some exterior perimeter sealants. Consult Carlisle Residential compatibility information. Carlisle Residential does not require the use of exterior perimeter sealant with EZ-Flash in window installations. EZ-Flash is not compatible with coal tar or polysulfide sealants or plasticized PVC membranes. In wall flashing applications, the edge of EZ-Flash must be kept ½" or more from finished exterior and must not come in contact with any visible sealant.

In self-adhesive roofing applications, EZ-Flash (minimum 9" width) can be applied over EZROOF® Base synthetic felt at critical detail areas prior to application of the self-adhesive cap sheet.

STORAGE

Protect materials from excessive heat or cold. Store away from open flames, sparks or welding. For outside storage, protect cartons from rain, direct sunlight or other harmful environmental conditions. Consult with Carlisle representative for extreme high or low temperatures.

PACKAGING

4" wide x 100' (33.3 sq ft), 12 rolls/case, 27 cases/pallet
 6" wide x 100' (50 sq ft), 8 rolls/case, 27 cases/pallet
 9" wide x 100' (75 sq ft), 4 rolls/case, 36 cases/pallet
 12" wide x 100' (100 sq ft), 4 rolls/case, 27 cases/pallet

CONTACT ADHESIVE	PACKAGING	APPLICATION METHOD	ADVANTAGES
TRAVEL-TACK™	15-oz aerosol can	Spray onto surface and allow to dry, generally < 5 minutes	Spray onto surface and allow to dry, generally < 5 minutes
CAV-GRIP	40-lb aerosol cylinder	Spray onto surface and allow to dry, generally < 5 minutes	Spray onto surface and allow to dry, generally < 5 minutes
CCW-02 Solvent Based	1-gallon pail/5-gallon pail	Sprayer, brush or roller. Allow to dry minimum 30 minutes	Sprayer, brush or roller. Allow to dry minimum 30 minutes
CCW-AWP Water Based	1-gallon pail/5-gallon pail	Sprayer, brush or roller. Allow to dry minimum 20 minutes	Sprayer, brush or roller. Allow to dry minimum 20 minutes

LIMITATIONS

- Do not use in areas where flashing will be subject to continuous exposure to sunlight or to temperatures in excess of 150°F
- EZ-Flash is not intended for permanent exposure. Cover as soon as scheduling allows or within a maximum of 30 days of application
- Do not apply CCW contact adhesive or EZ-Flash to damp, frosty, dirty or contaminated surfaces



LIMITED WARRANTY

Carlisle Residential (Carlisle) warrants this product to be free of defects in workmanship and materials only at the time of shipment from our factory. If any Carlisle materials prove to contain manufacturing defects that substantially affect their performance, Carlisle will, at its option, replace the materials or refund their purchase price.

This limited warranty is the only warranty extended by Carlisle with respect to its materials. There are no other warranties, including the implied warranties of merchantability and fitness for a particular purpose. Carlisle specifically disclaims liability for any incidental, consequential or other damages, including, but not limited to, loss of profits or damages to a structure or its contents, arising under any theory of law whatsoever.

The dollar value of Carlisle's liability and buyer's remedy under this limited warranty shall not exceed the purchase price of the Carlisle material in question.

TYPICAL APPLICATION DETAILS

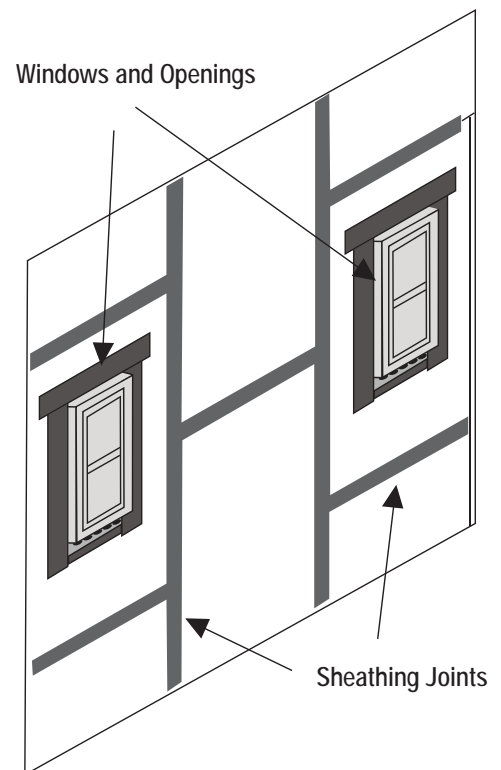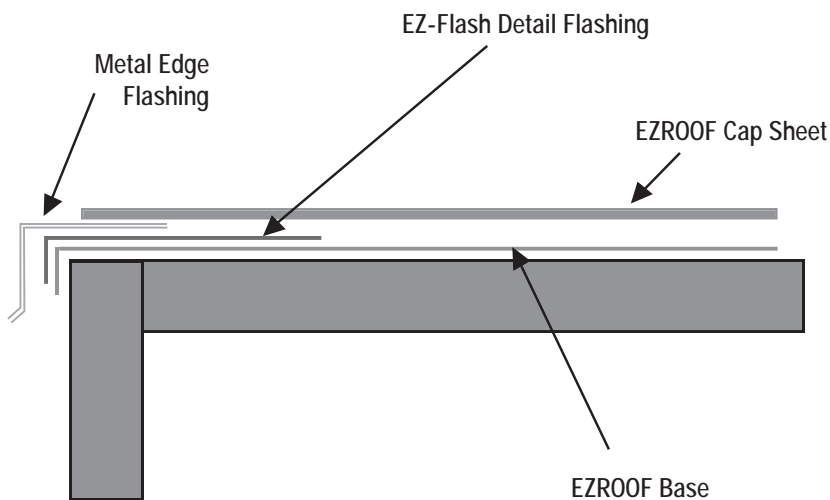

1285 Ritner Highway • Carlisle, PA 17013 • (800) 211-7170 • www.carlisleresidential.com

Carlisle, EZ-Flash, EZROOF and TRAVEL-TACK are trademarks of Carlisle. © 2008 Carlisle
601956 EZ-Flash Technical Data Sheet 05/08.